

# Cleve

12x24 Porcelain



03CLV011224FST



03CLV021224FST



2x4 Stacked Mosaic




03CLV031224FST



03CLV041224FST



Mod-Hex Mosaic

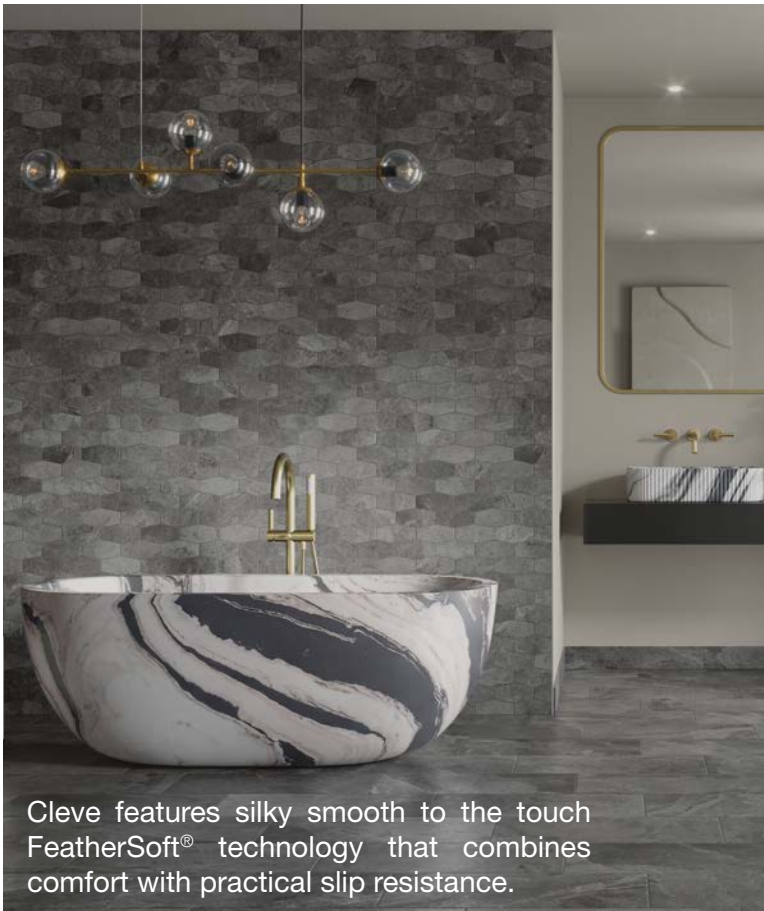

Cleve features silky smooth to the touch FeatherSoft® technology that combines comfort with practical slip resistance.

- Tile: 12x24 - 24x24 - 24x48
- Mosaic: 2x4 Stacked - 10x15 Mod-Hex
- Trim: 4x24 Bullnose - 6x12 Cove Base

*Not all sizes available in all finishes*

For more information and images:



## Technical Characteristics

Test Item	Test Method	Test Result
Breaking Strength	ASTM C648	≥ 450 lbf
Bond Strength	ASTM C482	> 200 psi
Facial Dimension	ASTM C1026	± 0.10%
Range of Thickness	ASTM C499	0.025 in
Warpage Diagonal	ASTM C485	± 0.20%
Wedging	ASTM C502	± 0.25%
Frost Resistance	ASTM C1026	Resistant
Chemical Resistance	ASTM C650	Unaffected
Stain Resistance	ASTM C1378	Class A
Crazing Resistance	ASTM C424	Resistant
Thermal Shock Resistance	ASTM C484	Resistant
Water Absorption	ASTM C373	< 0.50%
Scratch Hardness	Mohs Scale	7
Dynamic Coefficient of Friction	AcuTest	0.50-0.60

Nominal Size	Actual Size	Thickness	Finish	Rectified
12" x 24"	11.69" x 23.50"	9.5	FeatherSoft®	Yes
24" x 24"	23.50" x 23.50"	9.5	FeatherSoft®	Yes
24" x 48"	23.50" x 47.13"	10.5	FeatherSoft®	Yes
2" x 4" Mosaic	11.69" x 11.69"	9.5	FeatherSoft®	-
10" x 15" Mod-Hex Mosaic	10.51" x 14.60"	9.5	FeatherSoft®	-
4" x 24" Bullnose	3.82" x 23.50"	9.5	FeatherSoft®	-
6" x 12" Cove Base	5.91" x 11.69"	9.5	Unpolished	-

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.