

Chamonix

12x24 Color Body Porcelain

mosaic 
Products. Design. Solutions.



70CHABIA1224



70CHABEI1224




70CHAGRA1224



70CHADAR1224




2x2 Mosaic



1.4x1.4 Mosaic



4" Hexagon

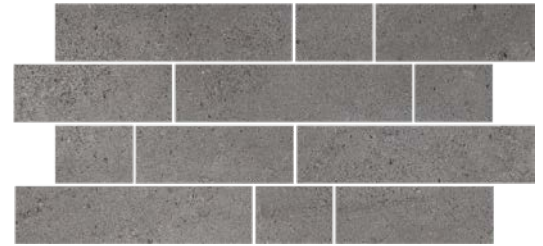

Muretto Brick



Tile: 12x24 - 24x24 - 24x48

Mosaics: 1.4x1.4 - 2x2 - 4" Hexagon
12x24 Muretto Brick

Trim: 4x24 Bullnose

Outdoor: 20mm 24x24 - 12x24 Pool Coping 12x24 Step

Not all colors available in all sizes

For more information
and images:





Technical Characteristics

Reference	Characteristic	Test Method	Required Values	Value	
Dimensional Standard	Calibrated	Nominal Size	ASTM C499	± 3%	Comply
		Caliber Range	ASTM C499	± 0.5% ± 0.08 in	Comply
		Warpage Edge	ASTM C485	± 0.5% ± 0.07 in	Comply
		Warpage Diagonal	ASTM C485	± 0.5% ± 0.07 in	Comply
		Wedging	ASTM C502	± 0.5% ± 0.08 in	Comply
	Rectified	Nominal Size	ASTM C499	- 3% + 2%	Comply
		Caliber Range	ASTM C499	± 0.25% ± 0.03 in	Comply
		Warpage Edge	ASTM C485	± 0.4% ± 0.05 in	Comply
		Warpage Diagonal	ASTM C485	± 0.4% ± 0.07 in	Comply
		Wedging	ASTM C502	± 0.25% ± 0.03 in	Comply
Mechanical Standard	Thickness	ASTM C499	± 0.040 in	Comply	
	DEEP Abrasion	ASTM C1243	< 175mm ³	~ 40 mm ³	
	Bond Strength	ASTM C482	≥ 50 psi	Comply	
	Water Absorption	ASTM C373	Maximum 0.5%	~ 0.2%	
	Thermal Shock Resistance	ASTM C484	Pass	Comply	
	Chemical Resistance	ASTM C650	Pass	Class A	
	Stain Resistance	ASTM C1378	Pass	Class A	
	Breaking Strength	ASTM C648	≥ 275 lbf	Comply (Nat); ~ 3,000 lbf. (20mm)	
	Resistance to Freeze / Thaw Cycling	ASTM C1026	As Reported	Resistant	
	Scratch Hardness	Mohs	Declared Value	Mohs ≥ 6	
	Fire Reaction - Floor; Wall	EN 13823	Not Required	No reaction - A1fl (F); A1 (W)	
	VOC	No VOC			
	Dynamic Coefficient of Friction DCOF	ANSI A326.3	≥ 0.42 Wet	0.59 (Nat); 0.75 (20 mm)	

Nominal Size	Actual Size	Thickness	Rectified
12" x 24"	11.81" x 23.62"	8.5 mm	Yes
24" x 24"	23.62" x 23.62"	8.5 mm	Yes
24" x 48"	23.62" x 47.24"	8.5 mm	Yes
1.4" x 1.4" Mosaic	11.81" x 11.81"	8.5 mm	-
2" x 2" Mosaic	11.75" x 11.75"	8.5 mm	-
4" Hexagon Mosaic	10.24" x 11.81"	8.5 mm	-
12" x 24" Muretto Brick	11.81" x 23.62"	8.5 mm	-
4" x 24" Bullnose	3.94" x 23.62"	8.5 mm	-
24" x 24" Paver	23.62" x 23.62"	20 mm	-
12" x 24" Pool Coping* or Step**	11.81" x 23.62"	20 mm	-

* Also available in 30 mm. ** Special order with minimum order requirements. Inquire with a sales representative for additional details and lead times.

Values reflect an average among tests performed in the manufacturer's laboratory according to the standard requirements and/or through a third party laboratory. Tests are performed on actual production, first choice material. Values may vary between single individual production runs.

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.