


New England

12x24 Color Body Porcelain




70NEWWHI1224

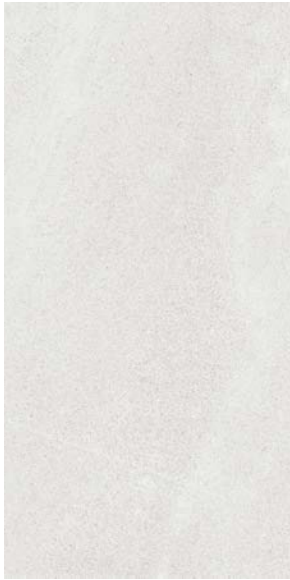


70NEWIVO1224



70NEWCOL1224

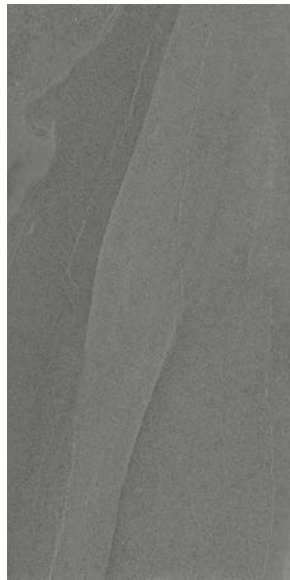

70NEWANT1224



1.4x1.4



Brick



Herringbone



Tile: 4x12 - 12x24 - 24x24 - 24x48

Mosaic: 1.4x1.4 - 2x4 Brick
2x4 Herringbone

Trim: 4x24 Bullnose

Outdoor: 20mm 16x32 - 24x24 - 24x48

Not all colors available in all sizes or finishes

*For more information
and images:*





Technical Characteristics

Reference	Characteristic	Test Method	Required Values	Value	
Dimensional Standard	Calibrated	Nominal Size	ASTM C499	± 3%	Comply
		Caliber Range	ASTM C499	± 0.5% ± 0.08 in	Comply
		Warpage Edge	ASTM C485	± 0.5% ± 0.07 in	Comply
		Warpage Diagonal	ASTM C485	± 0.5% ± 0.07 in	Comply
		Wedging	ASTM C502	± 0.5% ± 0.08 in	Comply
	Rectified	Nominal Size	ASTM C499	- 3% + 2%	Comply
		Caliber Range	ASTM C499	± 0.25% ± 0.03 in	Comply
		Warpage Edge	ASTM C485	± 0.4% ± 0.05 in	Comply
		Warpage Diagonal	ASTM C485	± 0.4% ± 0.07 in	Comply
		Wedging	ASTM C502	± 0.25% ± 0.03 in	Comply
Mechanical Standard	Thickness	ASTM C499	± 0.040 in	Comply	
	DEEP Abrasion	ASTM C1243	< 175mm ³	~ 40 mm ³	
	Bond Strength	ASTM C482	≥ 50 psi	Comply	
	Water Absorption	ASTM C373	Maximum 0.5%	~ 0.2%	
	Thermal Shock Resistance	ASTM C484	Pass	Comply	
	Chemical Resistance	ASTM C650	Pass	Comply	
	Stain Resistance	ASTM C1378	Pass	Comply	
	Breaking Strength	ASTM C648	≥ 275 lbf	Comply	
	Resistance to Freeze / Thaw Cycling	ASTM C1026	As Reported	Comply	
	Scratch Hardness	Mohs	Declared Value	Mohs ≥ 7	
	VOC	No VOC			
	Dynamic Coefficient of Friction DCOF	ANSI A326.3	≥ 0.42 Wet	0.60 (Nat); 0.74 (20mm)	

Nominal Size	Actual Size	Thickness	Rectified
4" x 12"	3.94" x 11.81"	8.5 mm	Yes
* 12" x 24"*	11.81" x 23.62"	8.5 mm	Yes
24" x 24"	23.62" x 23.62"	8.5 mm	Yes
24" x 48"	23.62" x 47.24"	8.5 mm	Yes
1.4" x 1.4" Mosaic	11.81" x 11.81"	8.5 mm	-
2" x 4" Brick Mosaic	11.81" x 11.81" (1.85" x 3.82" piece)	8.5 mm	-
2" x 4" Herringbone Mosaic	12.2" x 13.78" (1.85" x 3.82" piece)	8.5 mm	-
4" x 24" Bullnose	3.94" x 23.62"	8.5 mm	-
16" x 32" Paver	15.75" x 31.5"	20 mm	-
24" x 24" Paver	23.62" x 23.62"	20 mm	-
24" x 48" Paver	23.62" x 47.24"	20 mm	-

* Available in Matte or Grip

Values reflect an average among tests performed in the manufacturer's laboratory according to the standard requirements and/or through a third party laboratory. Tests are performed on actual production, first choice material. Values may vary between single individual production runs.

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.