



Blanc Stone


12x24 Porcelain

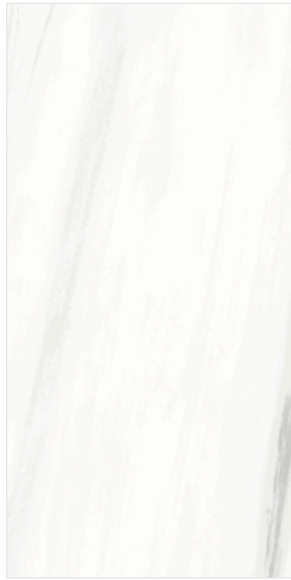


75BLAWHI1224
(matte)

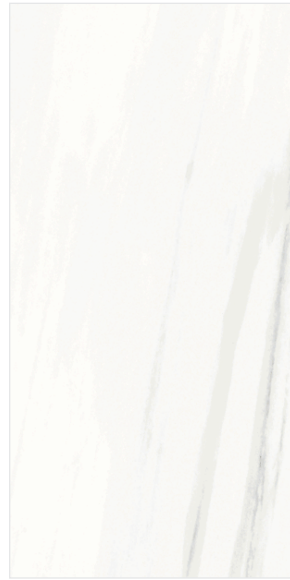

75BLAWHI1224P
(polished)



2x2 Mosaic

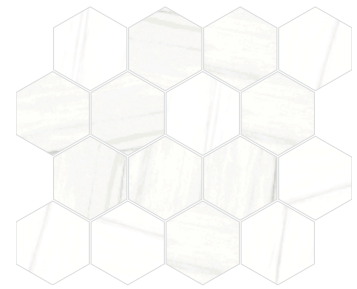

3" Hexagon



QuickSHIP

Tile: 12x24

Mosaic: 2x2 Matte

Recommended Jolly Edge Trim:
3/8" J100 White

Non-QuickSHIP items are available for commercial projects only. Inquire with a sales representative for additional information.

Tile: 24x48

Mosaic: 2x2 Polished - 3" Hexagon

For more information
and images:





Technical Characteristics

Test Item	Test Method	Test Result - Matte	Test Result - Polished
Breaking Strength	ASTM C648	≥ 425 lbs.	≥ 425 lbs.
Scratch Hardness	MOH'S	7.0	4.0 - 5.0
Chemical Resistance	ASTM C650-04	Class A	Class E
Abrasion Resistance	ASTM C1027	Class IV	Class III
Thermal Shock Resistance	ASTM C484	Resistant	Resistant
Frost Resistance	ASTM C1026	Resistant	Resistant
Water Absorption	ASTM C373	≤ 0.5%	≤ 0.5%
DCOF (Wet)	ASTM C1028	≥ 0.42	N/A
Category of Use	ANSI A326.3	IW	ID

Nominal Size	Actual Size	Thickness	Finish	Rectified
12" x 24"	11.75" x 23.56"	9.0 mm	Matte or Polished	Yes
24" x 48"	23.56" x 47.56"	9.0 mm	Matte or Polished	Yes
2" x 2" Mosaic	11.75" x 11.75"	9.0 mm	Matte or Polished	-
3" Hexagon Mosaic	10.25" x 11.75"	9.0 mm	Matte or Polished	-

All tile is subject to variations in technical specifications and performance due to the inherent variables in the raw materials and production process. It is understood that test results on a particular product may vary slightly from tile to tile and from test to test. Test results are not guarantees of minimum or maximum thresholds of performance.

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.



For your convenience, select products are stocked in our Central Service Center.