

Jewels


12x24 Porcelain



88JEWLAU1224 (matte)
88JEWLAU1224P (pol.)



88JEWMAT1224 (matte)
88JEWMAT1224P (pol.)

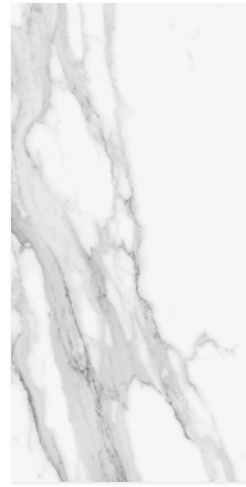

88JEWVIN1224 (matte)
88JEWVIN1224P (pol.)



88JEWELI1224 (matte)
88JEWELI1224P (pol.)



88JEWTHE1224 (matte)
88JEWTHE1224P (pol.)



88JEWECR1224 (matte)
88JEWECR1224P (pol.)



88JEWAGR1224 (matte)
88JEWAGR1224P (pol.)



24x48 Polished only
88JEWMAU2448P



Tile: 12x24 - 24x48

Mosaic: N/A

Trim: N/A

Not all colors available in all sizes or finishes.

*For more information
and images:*



Technical Characteristics

Test Item	Test Method	Test Result
Water Absorption	ASTM C373	≤ 0.5%
Breaking Strength	ASTM C648	Min. 275
Chemical Resistance	ASTM C650	Class A (Resist) ¹
Stain Resistance	ASTM C1378	Class A
Frost Resistance	ASTM C1026	Resistant
Thermal Shock Resistance	ASTM C484	Resistant
Scratch Hardness	Mohs Scale	7
Group	--	4
PEI - Glazed Tiles	ASTM C1027	3
DCOF	A326.3	< 0.42 (polished); ≥ 0.42 (matte)
Shade and Texture Rating	CTDA "V"	V2-V3
Facial Dimensions	ASTM C499	Pass
Range of Thickness	ASTM C499	Pass
Warpage	ASTM C485	Pass
Wedging	ASTM C502	Pass

Nominal Size	Actual Size	Thickness	Finish	Rectified
12" x 24"	11.81" x 23.62"	8.0 mm	Matte or Polished	Yes
24" x 48"	23.62" x 47.24"	6.5 mm	Matte or Polished	Yes

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.

