


Replacement Parts / Pièces de rechange / Repuestos

UF38000
UF38003
UF38005
UF38007

No.	Description	Part No.
1	Aerator Assembly	5E0005200PL0
2	Deck Plate Assembly	XXXXXXX
3	Lavatory Spout Mounting Hardware	5Q0M0323NT
4	Push Drain Assembly	5Y0161900CP/AP/HA0
5	Braided Hose(Hot)	5G0004000CC7
6	Braided Hose(Cold)	5G0004100CC7
7	Set Screw	5T0007000NT0
8	Dome	5L0119400CP0
9	Nut	5T1013800NT0
10	Cartridge	5D8005200PL0

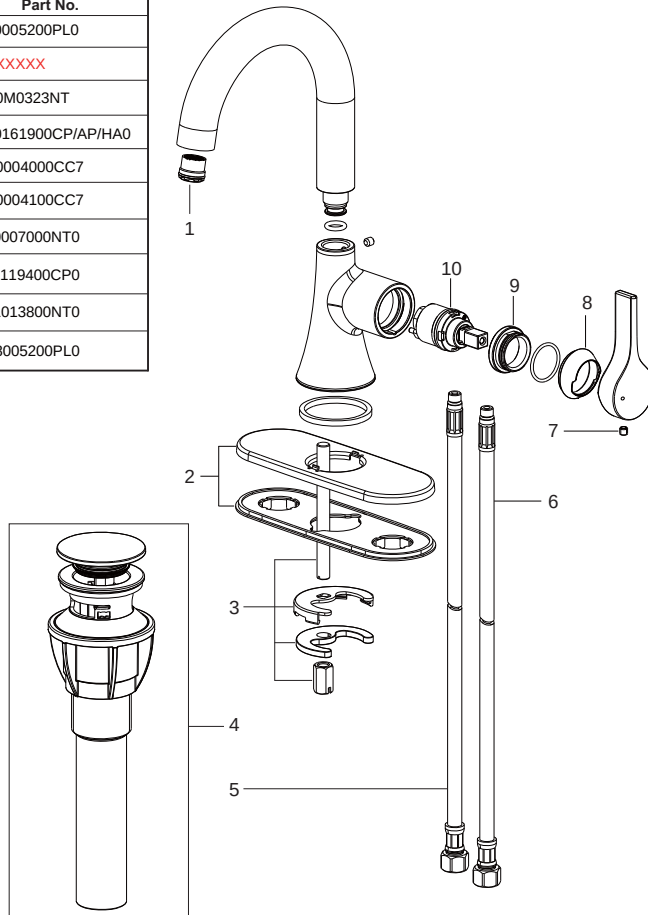

Limited Lifetime Warranty

Ultra Faucets warrants to the original purchaser that its products will be free from defects in workmanship and materials. All Ultra Faucets are provided with a life time limited warranty. This warranty does not cover any other labor or service charges associated with the removal, repair, or reinstallation of Ultra Faucets products. This express warranty does not apply to products that have been damaged as a result of misuse, abuse, negligence, accident, faulty installation or maintenance practices and/or used in any manner contrary to those recommended by the manufacturer.

Need help? Please call our toll-free customer service line at 1-888-658-5872 for additional assistance or service.

Besoin d'aide? Veuillez communiquer avec notre service à la clientèle au numéro gratuit 1-888-658-5872 pour tous renseignements ou services complémentaires.

¿Requiere asistencia? Llame a nuestro Servicio al Cliente, sin costo, al 1-888-658-5872 para asistencia adicional o servicio.

Revised 12-2018

Nita Collection

Single Handle Lavatory Faucet



Installation/Installation/Instalación

CUSTOMER SERVICE

TOLL-FREE 1-888-OK-ULTRA (658-5872)

UF38000 - Polished Chrome


UF38003 - PVD Brushed Nickel

UF38005 - Oil Rubbed Bronze

UF38007 - Matte Black




Tools You Will Need / Outils dont vous aurez besoin / Herramientas necesarias



Adjustable Wrench

Clé à molette

Llave ajustable



Phillips Screwdriver

Tournevis Phillips

Destornillador cruciforme

SAFETY TIPS

- If you use soldering for the installation of the faucet, the seats, cartridges and washers will have to be removed before using flame. Otherwise, warranty will be void on those parts.
- Cover your drain to avoid losing parts.
- 0°C~55°C.

CONSIGNES DE SÉCURITÉ


- Si vous posez le robinet par brasage, il est essentiel de retirer les sièges, les cartouches et les rondelles avant d'appliquer la flamme, faute de quoi la garantie sur ces pièces sera annulée.
- Couvrez le drain pour ne pas perdre des pièces.
- 0°C~55°C.

CONSEJOS DE SEGURIDAD


- En el caso de utilizar soldadura para instalar el grifo, remueva los asientos, cartuchos y arandelas antes de usar la llama. De lo contrario, se anulará la garantía para esos componentes.
- Tape la boca del desagüe para prevenir la pérdida de piezas pequeñas.
- 0°C~55°C.

Revised 12-2018


UF38000
UF38003
UF38005
UF38007

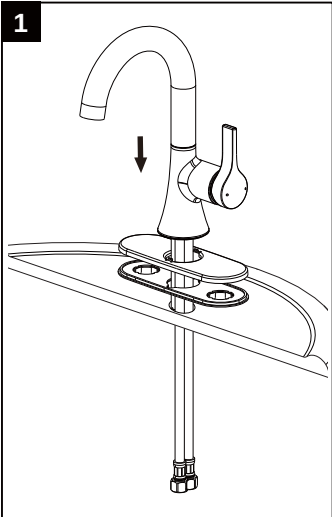


1
Install the faucet through the mounting hole.

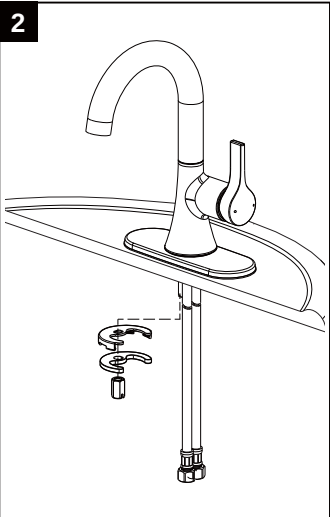


2
Carefully tighten Spout Mounting hardware to secure faucet.

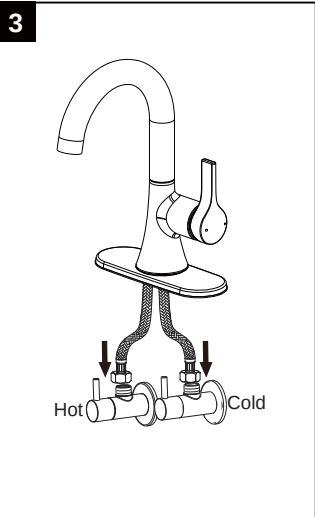


3
Connect the water supply lines to the hot and cold angle stops.

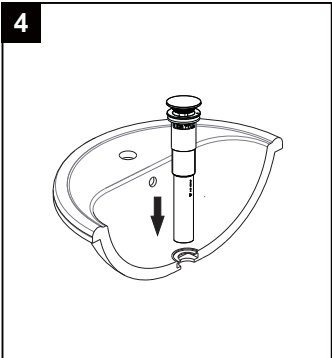


4
Slide push drain trim and plug into drain hole.

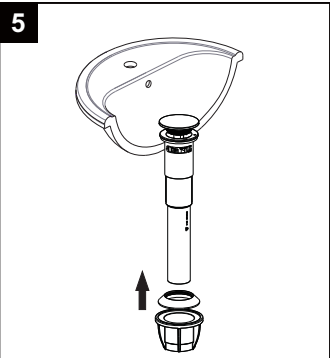

5
Install sealing washer with plastic nut into drain body and tighten it to secure.

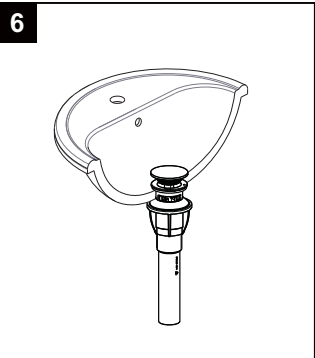

6
Complete the assembly.

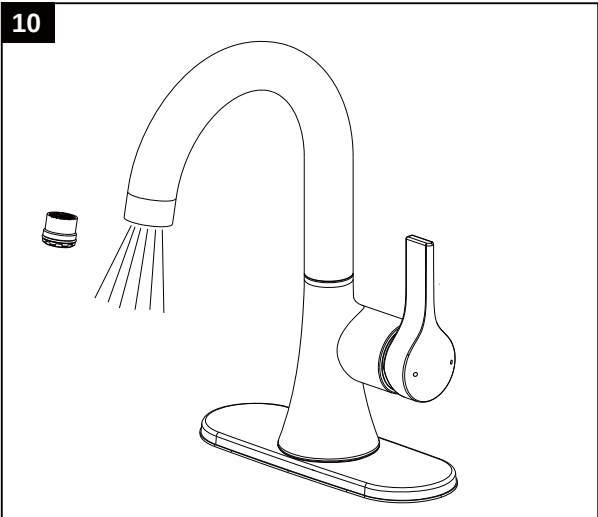

10
Remove aerator with coin and flush out debris. Reinstall aerator.