





PORCELAIN | PORCELÁNICO

Size cm	Inches	Tiles/Box	SQM/Box	Boxes/Pallet	SQM/Pallet	Thickness	Kgs/Piece	Kgs/Box	Kgs/Pallet	Size Pallet
Medidas cm	Pulgadas	Pzas./Caja	m ² /Caja aprox.	Cajas/Palet	m ² /Palet aprox.	Espesor aprox.	Kgs/Pieza	Kgs/Caja aprox.	Kgs/Palet aprox.	Medida Palet
60x120 Rect.	23.62"x47.24"	2	1.44	27	38.88	10,5	17,76	35.84	983	80x120
30x120 Rect.	11.81"x47.24"	3	1.08	36	38.88	10,5	8,66	26,22	959	80x120
31,6x63,5	12,44x25,00"	7	1,40	40	56,00	9,0	3,85	26,95	1098	80x120


JUMANJI




Jumanji Black Mosaic
73JUM-BLK-MOS
11.8x11.8"

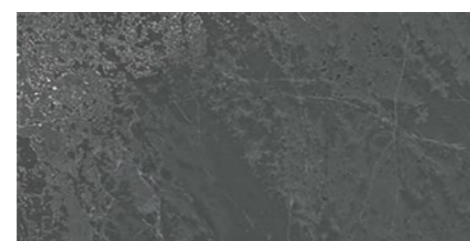

Jumanji Black 12x25
73JUM-BLK-1225
12.5"x25"

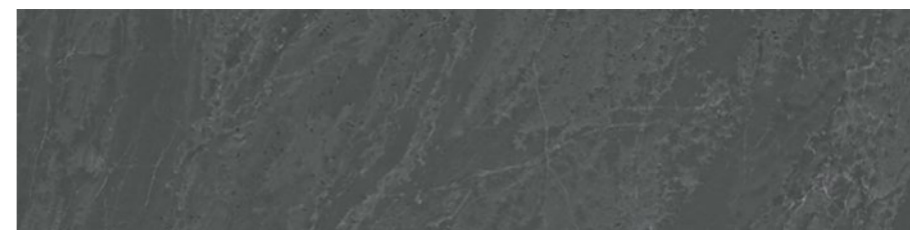


Jumanji Black 12x48
73JUM-BLK-1248
11.8"x47.3"

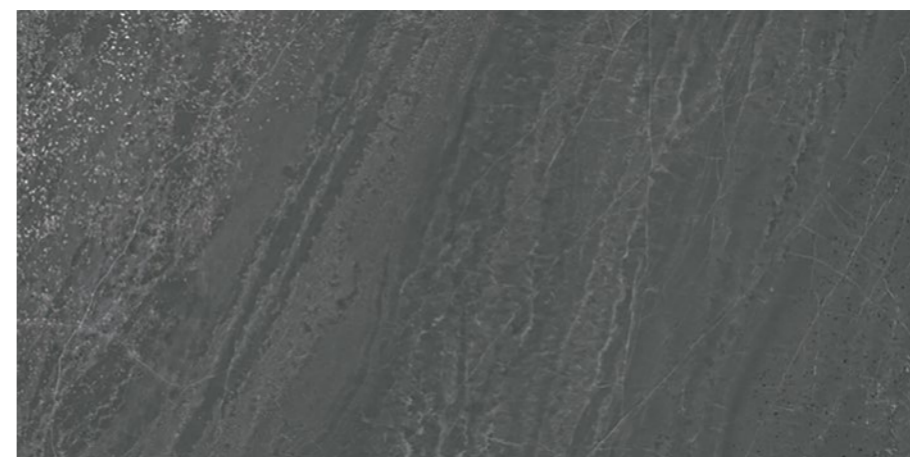

Jumanji Black 24x48
73JUM-BLK-2448
23.6"x47.3"



JUMANJI black

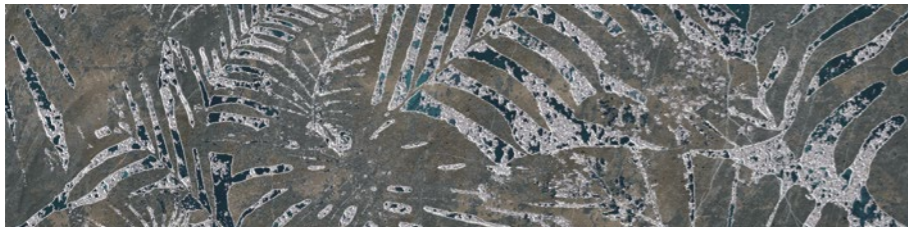


Jumanji Black Tropic Deco
73JUM-BLK-TROP
11.8"x47.3"



Jumanji Black Textures Deco
73JUM-BLK-TEX
11.8 x 47.3"






Jumanji Pearl Mosaic
73JUM-PRL-MOS
11.8" x 11.8"



Jumanji Pearl 12x25
73JUM-PRL-1225
12.5" x 25"




Jumanji Pearl 12x48
73JUM-PRL-1248
11.8" x 47.3"

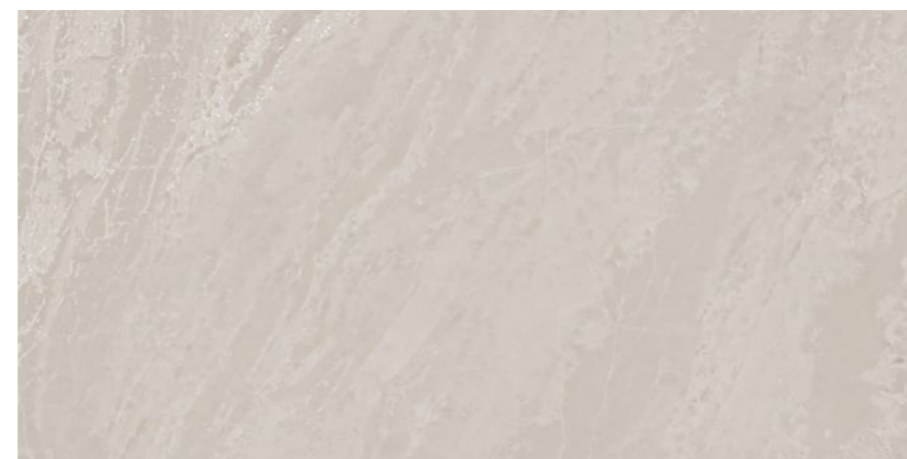

Jumanji Pearl 24x48
73JUM-PRL-2448
23.6" x 47.3"



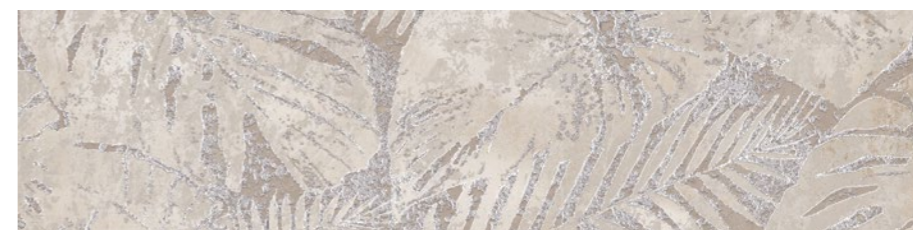

Jumanji Pearl Tropic Deco
73JUM-PRL-TROP
11.8" x 47.3"



Jumanji Pearl Textures Deco
11.8 x 47.3"



TECHNICAL DATA SHEET

Date	Material	Size
12/03/2020	Jumanji Textures Deco	11.8"x47.3"
Reference number of the declaration of performance CE marking		003PCI2013-19
Test	Result	Testing standard
Manufacture process	Single firing	
Average thickness	10,5	UNE-EN ISO 10545-2: 1998
Dimensions and surface quality	Conform to the requisites applicable to each model as defined in the standard UNE-EN 14411 for group Bla	UNE-EN ISO 10545-2: 1998
Water absorption %	≤ 0,5	UNE-EN ISO 10545-3: 2018
Moduluss of rupture N/mm2	≥ 40	UNE-EN ISO 10545-4: 2015
Scratch hardness according to Mohs		EN 101: 1991 (UNE 67101)
Resistance to the abrasion	Class 3	UNE-EN ISO 10545-7: 1999
Resistance to thermal shock	It stands the test	UNE-EN ISO 10545-9: 2013
Cracking resistance	It stands the test	UNE-EN ISO 10545-11: 1997
Frost resistance	It stands the test	UNE-EN ISO 10545-12: 1997
Stain resistance	Class 5	UNE-EN ISO 10545-14: 2015
Resistance to cleansing products and chemical products for swimming pool water	Class A	UNE-EN ISO 10545-13: 2017
Resistance to soft and strong, alcalis and acids	Class HA/LA	UNE-EN ISO 10545-13: 2017
Resistance to slip	Class	UNE-ENV 12633:2003
	Class	DIN 51130:2010 Apdo 5
	Class	DIN 51097:1992
	Coeff.	DCOF ANSI A137-1-2012

Date	Material	Size
12/03/2020	Jumanji Tropic Deco	11.8"x47.3"
Reference number of the declaration of performance CE marking		003PCI2013-19
Test	Result	Testing standard
Manufacture process	Single firing	
Average thickness	10,5	UNE-EN ISO 10545-2: 1998
Dimensions and surface quality	Conform to the requisites applicable to each model as defined in the standard UNE-EN 14411 for group Bla	UNE-EN ISO 10545-2: 1998
Water absorption %	≤ 0,5	UNE-EN ISO 10545-3: 2018
Moduluss of rupture N/mm2	≥ 40	UNE-EN ISO 10545-4: 2015
Scratch hardness according to Mohs		EN 101: 1991 (UNE 67101)
Resistance to the abrasion	Class 3	UNE-EN ISO 10545-7: 1999
Resistance to thermal shock	It stands the test	UNE-EN ISO 10545-9: 2013
Cracking resistance	It stands the test	UNE-EN ISO 10545-11: 1997
Frost resistance	It stands the test	UNE-EN ISO 10545-12: 1997
Stain resistance	Class 5	UNE-EN ISO 10545-14: 2015
Resistance to cleansing products and chemical products for swimming pool water	Class A	UNE-EN ISO 10545-13: 2017
Resistance to soft and strong, alcalis and acids	Class HA/LA	UNE-EN ISO 10545-13: 2017
Resistance to slip	Class C1	UNE-ENV 12633:2003
	Class R10	DIN 51130:2010 Apdo 5
	Class B	DIN 51097:1992
	Coeff.	DCOF ANSI A137-1-2012

Date	Material	Size
11/03/2020	Jumanji 12x25/12x48/24x48, Jumanji Mosaic	11.8" x 11.8", 12.5" x 25", 11.8"x47.3", 23.6x47.3"
Reference number of the declaration of performance CE marking		003PCI2013-19
Test	Result	Testing standard
Manufacture process	Single firing	
Average thickness	9	UNE-EN ISO 10545-2: 1998
Dimensions and surface quality	Conform to the requisites applicable to each model as defined in the standard UNE-EN 14411 for group Bla	UNE-EN ISO 10545-2: 1998
Water absorption %	≤ 0,5	UNE-EN ISO 10545-3: 2018
Moduluss of rupture N/mm2	≥ 40	UNE-EN ISO 10545-4: 2015
Scratch hardness according to Mohs		EN 101: 1991 (UNE 67101)
Resistance to the abrasion	Class	UNE-EN ISO 10545-7: 1999
Resistance to thermal shock	It stands the test	UNE-EN ISO 10545-9: 2013
Cracking resistance	It stands the test	UNE-EN ISO 10545-11: 1997
Frost resistance	It stands the test	UNE-EN ISO 10545-12: 1997
Stain resistance	Class 5	UNE-EN ISO 10545-14: 2015
Resistance to cleansing products and chemical products for swimming pool water	Class A	UNE-EN ISO 10545-13: 2017
Resistance to soft and strong, alcalis and acids	Class HA/LA	UNE-EN ISO 10545-13: 2017
Resistance to slip	Class	UNE-ENV 12633:2003
	Class	DIN 51130:2010 Apdo 5
	Class	DIN 51097:1992
	Coeff.	DCOF ANSI A137-1-2012



JUMANJI