

Civilization

12x24 Porcelain



03CIV011224SPO (semi)
03CIV011224 (unpol)



03CIV021224SPO (semi)
03CIV021224 (unpol)



03CIV051224SPO (semi)
03CIV051224 (unpol)




2x2 Mosaic



Warm Blend Polygon
Also in all solid colors



03CIV031224SPO (semi)
03CIV031224 (unpol)

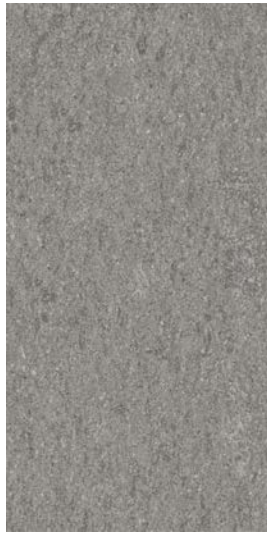

03CIV041224SPO (semi)
03CIV041224 (unpol)



03CIV061224SPO (semi)
03CIV061224 (unpol)



Light Blend Polygon



Cool Blend Polygon



Tile: 12x24 - 24x24 - 24x48

Mosaics: 2x2 - Polygon

Trim: 4x24 Bullnose - 6x12 Cove Base

Not all colors available in all sizes or finishes

*For more information
and images:*



Technical Characteristics

Test Item	Test Method	Test Result
Breaking Strength	ASTM C648	≥ 450 lbf
Bond Strength	ASTM C482	> 200 psi
Chemical Resistance	ASTM C650	Unaffected
Frost Resistance	ASTM C1026	Resistant
Water Absorption	ASTM C373	< 0.50%
Scratch Hardness	Mohs Scale	7
DCOF	AcuTest	0.42-0.52 (Semi-Polished); 0.50-0.60 (Unpolished)

Nominal Size	Actual Size	Thickness	Finish	Rectified
12" x 24"	11.69" x 23.5"	9.5 mm	Semi-polished or Unpolished	Yes
24" x 24"	23.5" x 23.5"	9.5 mm	Semi-polished or Unpolished	Yes
24" x 48"	23.5" x 47.13"	10.5 mm	Semi-polished or Unpolished	Yes
2" x 2" Mosaic	11.73" x 11.73"	9.5 mm	Unpolished	-
Polygon Mosaic	13.43" x 15.16"	9.5 mm	Unpolished	-
4" x 24" Bullnose	3.82" x 23.5"	9.5 mm	Semi-polished or Unpolished	-
6" x 12" Cove Base	5.91" x 11.69"	9.5 mm	Unpolished	-

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.

