

Trajectory

12x24 Porcelain

mosaic 
Products. Design. Solutions.




03TRY011224



03TRY021224




03TRY031224

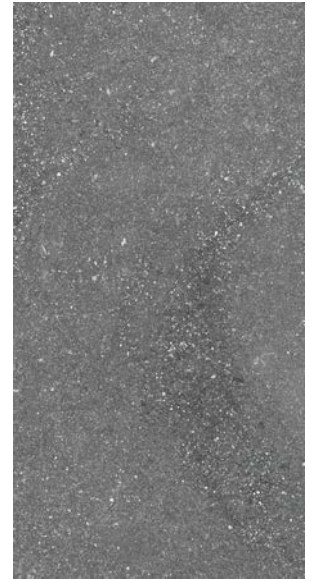

03TRY041224



2x4 Stacked Mosaic



Circle Mosaic

The “Unpolished” finish features an innovative Cross-Sheen® technology that is easy to clean, and greatly enhances the protection from the majority of scuffs, stains, and even most graffiti.



Tile: 12x24 - 24x24
Mosaics: 2x4 Stacked - Circle
Trim: 4x24 Bullnose - 6x12 Cove Base
Not all colors available in all sizes or finishes

For more information
and images:



Technical Characteristics

Test Item	Test Method	Test Result
Breaking Strength	ASTM C648	≥ 450 lbf
Bond Strength	ASTM C482	> 200 psi
Chemical Resistance	ASTM C650	Unaffected
Frost Resistance	ASTM C1026	Resistant
Water Absorption	ASTM C373	< 0.50%
Scratch Hardness	Mohs Scale	7
DCOF	ANSI A326.3	0.50-0.60 (Unpolished); 0.60-0.70 (Textured Exterior)

Nominal Size	Actual Size	Thickness	Finish	Rectified
12" x 24"	11.69" x 23.5"	9.5 mm	Unpolished	Yes
24" x 24"	23.5" x 23.5"	9.5 mm	Unpolished or Textured Exterior	Yes
2" x 4" Stacked Mosaic	11.69" x 11.69"	9.5 mm	Unpolished	-
14" x 14" Circle Mosaic	13.73" x 14.17"	9.5 mm	Unpolished	-
4" x 24" Bullnose	3.82" x 23.5"	9.5 mm	Unpolished	-
6" x 12" Cove Base	5.91" x 11.69"	9.5 mm	Unpolished	-

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.

